


**DEVIL 23 R
ROULOSANGE 600**

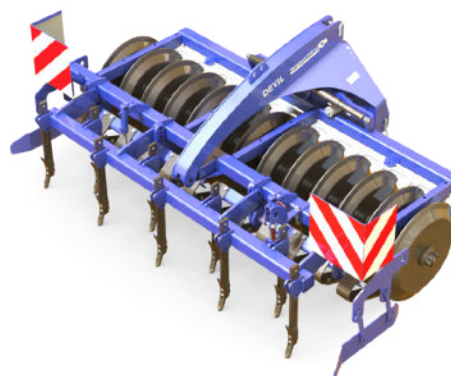

**DEVIL 15 F
RING 700**

DEVIL

With its compact, robust design, DEVIL is a front-mounted implement that can be used to complement your tractor's rear-mounted equipment, such as a seed drill or cultivator combination. It allows efficient recovery of previously ploughed or coarse cultivated soil.

BENEFITS

- Ensures straight, well-compacted ground.
- Versatility, whatever the season or ground conditions.
- Compact, stable, directional, high working speed.
- Hydraulic adjustment of the CROSS-BOARD levelling blade.

Description

A highly effective concept based on a combination of rigid tines followed by levelling blades (Cross-board) and finishing with consolidation elements (RING and ROULOSANGE). The rigid tines are ideal for reducing strips or clods. They can be adjusted quickly and easily using a spindle.

The tines are also protected by a safety device.

As an option, these levelling blades can be fitted with a hydraulic control for faster, more direct adjustment from the driver's seat !



DEVIL is very easy to drive thanks to a self-steering system with 2 shock absorbing and compensating cylinders.




DEVIL ROULOSANGE 600 + CROSS-BOARD		9 F	17 F	19 F	23 R*	25 R	29 R*	35 R*
PRICE (€ EX.T) Reference		DEV55105	DEV55113	DEV55115	DEV55120	DEV55125	DEV55130	DEV55140
OPTIONS	Equipment rigid teeth	DEV50171	DEV50401	DEV50411	DEV50421	DEV40426	DEV50431	DEV50441
	Hydraulics Cross-board	DEV50500	DEV50510	DEV50520	DEV50530	DEV50535	DEV50540	DEV50550
DEVIL RING 700 + CROSS-BOARD		7 F	13 F	15 F	17 R	19 R	21 R	25 R
PRICE (€ EX.T) Reference		DEV50105	DEV50113	DEV50115	DEV50120	DEV50125	DEV50130	DEV50140
OPTIONS	Equipment rigid teeth	DEV50170	DEV50400	DEV50410	DEV50420	DEV50425	DEV50430	DEV50440
	Hydraulics Cross-board	DEV50501	DEV50511	DEV50521	DEV50531	DEV50536	DEV50541	DEV50551
3 way valve kit hydraulic cross-board		PRICE (€ EX.T) Reference	HY20A	* ROULOSANGE 600 interface for combined widths of 3/4m, 4/5m or 5/6m				DEV50800

*EX.T : Excl Tax

Technical information

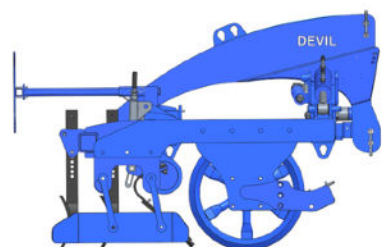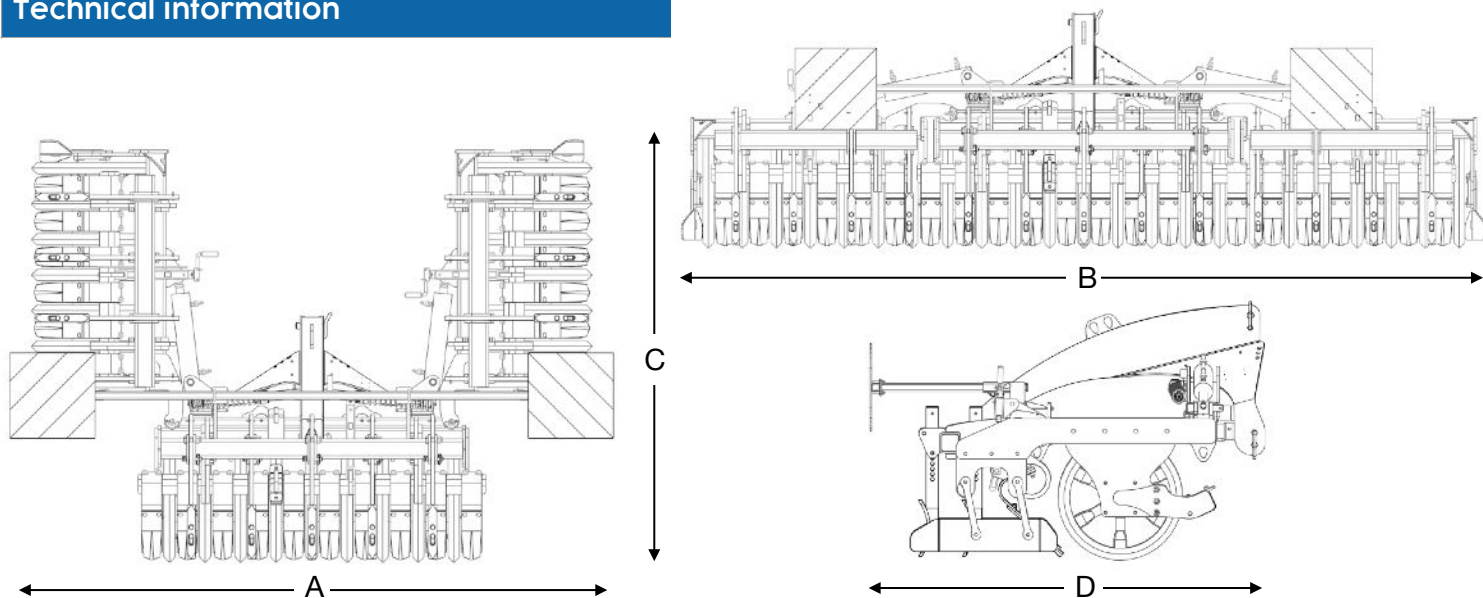

ROULOSANGE 600
 600 mm trapezoidal roller (40 mm square diagonally) + CROSS-BOARD and rigid teeth

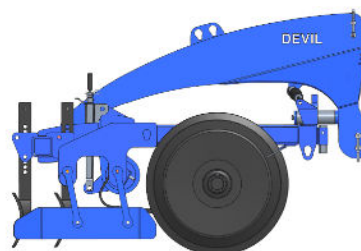

RING 700
 700 mm disc roller + CROSS-BOARD and rigid teeth

DEVIL ROULOSANGE 600 + CROSS-BOARD

Model	Effective working width	Overall width, folded (A)	Overall unfolded width (B)	Chassis type	Max height on support leg (C)	Depth with signalling (D)	Weight of complete machine (Kg)	Number of elements ROULOSANGE 600
DEVIL 9 F	1,75 m	1,75 m	1,75 m	Fixe	1,25 m	1,80 m	770	9
DEVIL 17 F	3,00 m	3,00 m	3,15 m	Fixe	1,25 m	1,80 m	1540	17
DEVIL 19 F	3,50 m	3,50 m	3,50 m	Fixe	1,25 m	1,80 m	1950	19
DEVIL 23 R	4,00 m	3,00 m	4,15 m	Folding	2,05 m	1,90 m	2200	23
DEVIL 25 R	4,50 m	3,00 m	4,70 m	Folding	2,05 m	1,90 m	2550	25
DEVIL 29 R	5,00 m	3,00 m	5,25 m	Folding	2,55 m	1,90 m	2750	29
DEVIL 35 R	6,00 m	3,00 m	6,35 m	Folding	3,15 m	1,90 m	3300	35

DEVIL RING 700 + CROSS-BOARD

DEVIL 7 F	1,50 m	1,50 m	1,75 m	Fixe	1,25 m	1,90 m	845	7
DEVIL 13 F	3,00 m	3,00 m	3,15 m	Fixe	1,25 m	1,90 m	1680	13
DEVIL 15 F	3,50 m	3,50 m	3,65 m	Fixe	1,25 m	1,90 m	1980	15
DEVIL 17 R	4,00 m	3,00 m	4,15 m	Folding	2,00 m	1,90 m	2280	17
DEVIL 19 R	4,50 m	3,00 m	4,65 m	Folding	2,25 m	1,90 m	2555	19
DEVIL 21 R	5,00 m	3,00 m	5,15 m	Folding	2,50 m	1,90 m	2870	21
DEVIL 25 R	6,00 m	3,00 m	6,15 m	Folding	3,10 m	1,90 m	3330	25