



TAPIR 80 E



TAPIR 125 E

# TAPIR

TAPIR tyred rollers combine robustness with great versatility to optimise seeding or preparation work by achieving optimum levelling and consolidation of the soil.

## BENEFITS

- .Autodirectional, making it easy to work with GPS guidance.
- . 3rd point depreciated for use with carry-over.
- . Large-diameter wheels with air chamber and A+E valve, for high compaction efficiency and good working stability.
- . Checking the tine tool setting from the driver's cab.
- . Working widths from 3 to 6 metres, with the option of intermediate formats.

## Description

When the soil is ploughed, it becomes drier and more porous, and capillary action is interrupted. To restore the soil's natural texture and quickly re-establish capillary action, the soil must be evenly reconsolidated at depth. The TAPIR tyred roller ensures optimal compaction, breaking up large clods, reconstituting the soil and preventing it from drying out. With ideal compaction of the tilled surface, TAPIR roller ensures even sowing at a constant depth, reduces clods and provides good levelling, saving one pass and reducing costs by favouring the work of rear implements. Combining HAV chassis with TAPIR offers an optimal combination of clod breaking, levelling the ploughing, favouring compaction and seeding precision, whilst reducing the effort required of rear implements.



TAPIR 80		80L 1.5	80 E 1.5	80 GL 3F	80 GL 3.5F	80 GL 4R	80 GL 4.5R
WHEELS 11,5/80 x 15,3	PRICE (€ EX.T) Reference	TA10505L	TA10505	TA10502	TA105035	TA10503	TA105045
TAPIR 125		125 E 1.65		125 GL 4R / 4.5R		125 GL 5R / 6R	
WHEELS 12,5/80 x 18	PRICE (€ EX.T) Reference	TA10506		TA10650		TA10656	
OPTIONS TAPIR 80	TAPIR/HAV hydraulic adaptation	PRICE (€ EX.T) Reference	HAV10501	OPTIONS TAPIR 125	HAV10504	Additional mass TAPIR 125	TA10664
	Water inflation + antifreeze (per wheel)	PRICE (€ EX.T) Reference	TA10662		TA10661	Side weight holder TAPIR 125	TA10663
	2 x 2000 lumen LED headlights	PRICE (€ EX.T) Reference	TA10685		TA10686	TAPIR 125 front weight carrier	TA10665
	3-way valve kit HY 20 A	PRICE (€ EX.T) Reference	HY20A		HY20A	TAPIR 80 AND 125 ADAPTABLE	

\* EX.T : Excl Tax

## Active organs




**Wheel 11.5 / 80 x 15.3**  
TAPIR 80




**Wheel 12.5 / 80 x 18**  
TAPIR 125

Assembled with internal envelope, fitted with AIR + WATER for wheel ballasting.

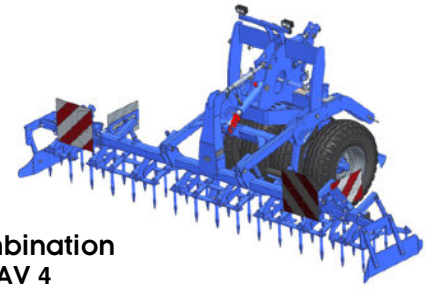


**Example combination**  
TAPIR 80 E + HAV 4

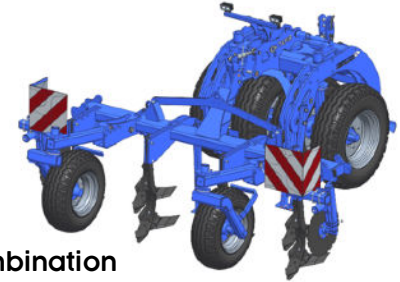

**Example combination**  
TAPIR 125 E + WEKA

## Technical information

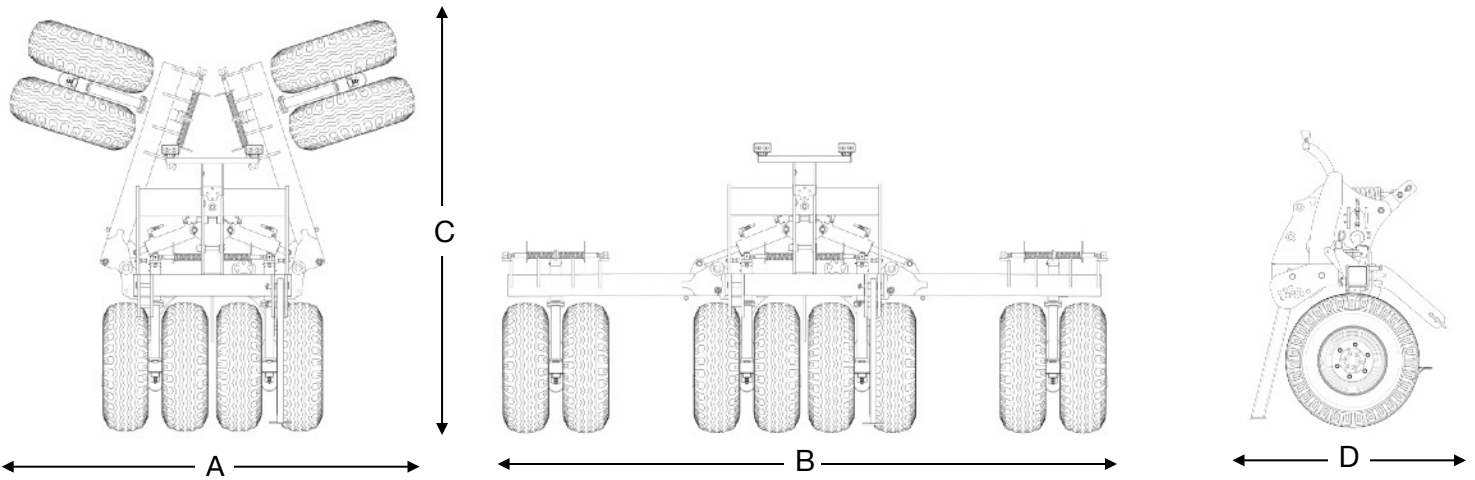

### TAPIR 80

Model	Effective working width	Overall width, folded (A)	Overall unfolded width (B)	Chassis type	Max height on support leg (C)	Depth with signalling (D)	Weight of complete machine (Kg)	Number of wheels	HP power Minimum
80 L 1.5	1,45 m	1,45 m	1,45 m	Fixed	1,85 m	1,30 m	607	4	120
80 E 1.5	1,45 m	1,45 m	1,45 m	Fixed	1,85 m	1,30 m	630	4	120
80 GL 3F	2,95 m	3,00 m	3,00 m	Fixed	1,85 m	1,30 m	800	6	120
80 GL 3.5F	3,45 m	3,50 m	3,50 m	Fixed	1,85 m	1,30 m	820	6	120
80 GL 4R	3,95 m	2,65 m	4,00 m	Folding	2,70 m	1,30 m	970	8	130
80 GL 4.5R	4,45 m	2,60 m	4,50 m	Folding	2,90 m	1,30 m	990	8	130

### TAPIR 125

125 E 1.5	1,65 m	1,70 m	1,70 m	Fixed	1,85 m	1,60 m	960	4	150
125 GL 4R	3,90 m	3,50 m	4,00 m	Folding	2,60 m	1,60 m	1840	8	170
125 GL 4.5R	4,40 m	3,40 m	4,50 m	Folding	3,35 m	1,60 m	1865	8	180
125 GL 5R	4,90 m	3,30 m	5,00 m	Folding	3,10 m	1,60 m	1980	8	200
125 GL 6R	5,90 m	3,10 m	6,00 m	Folding	3,60 m	1,60 m	2030	8	200